

fc s.dmx 48d

48 channel DMX controller

The **fc s.dmx 48d** controller is an intelligent lighting control unit offering all the benefits of DMX512 technology. Up to 48 channels can be used for controlling DMX receivers.



Properties

Use our free software to design your own light show – up to four dynamic sequences with any fade and hold times can be stored. Once programmed via a PC, the unit automatically replays the stored values as a stand-alone controller. It can be expanded with additional instruments such as timer switches and motion sensors to provide the basis for perfect performance. Precise control over lighting effects and color-chases can create the right atmosphere in so many different applications such as the theatre, architecture, trade fairs, hotels, restaurants and artistic lighting installations. The controller can be quickly and easily connected to your PC via a null modem cable. DIN rail mounting and direct connection to the power supply ensure that the controller is easy to use.

Ordering data

Product name	fc s.dmx 48d
Item number	00000031

Available versions




Combinable with products of the following categories



fc s.dmx 48d

48 channel DMX controller

Wiring Diagram

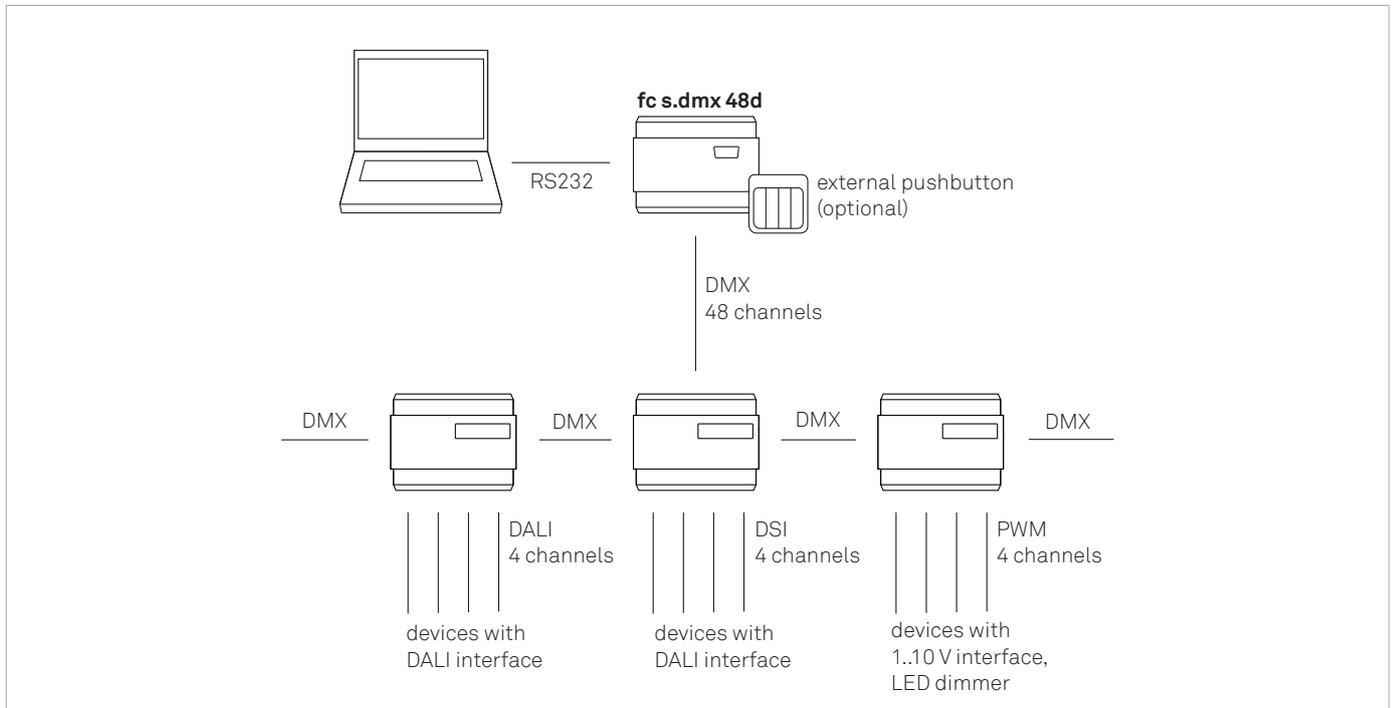

Technical Details

Supply voltage	230 V, 50/60 Hz
Current draw	0,03 A max.
Light programs	4 (freely programmable)
Programming interface	RS232
Inputs	4 x pushbuttons
Number of outputs	1
Number of control channels	48
Output signal	DMX
Galvanic isolation input/output	yes
Short-circuit-proof outputs	yes
Temperature range	-20..45 °C
Dimensions (L/W/H)	105 x 90 x 60 mm
Weight	330 g

Additional Information

feno control software can be downloaded at www.feno.com.

Cable and adapter are not included in delivery.