

fc s.dmx 48u

48 channel DMX controller

Intelligent, intuitive and cost effective: the DMX fc s.dmx 48u controller from feno. The clever light controller for small to medium-sized installations offers the entire spectrum of the DMX512 technology. The compact, ingenious device functions not only as a computer-aided controller for up to 512 channels but also runs the light programme as a stand-alone controller for up to 48 channels.



Properties

- Any desired dynamic light scenes programmable via feno control software
- Stand-alone-playback of light show without PC via power plug (included in the delivery)
- Intelligent DMX light controller for interior and exterior lighting or light art projects
- simple programming via PC (USB-cable)
- Handy size, plug-&-play installation
- Power supply via USB or power plug
- replaces fc dmx 512u
- Addressing of DMX devices possible via PC

Combinable with the following feno products



fe s.soft lt1-4 pro



fd dmx 3-48e



fd dmx 12-48d


Ordering Information

Product name	fc s.dmx 48u
Item number	0000 3522

fc s.dmx 48u

48 channel DMX controller

Wiring Diagram

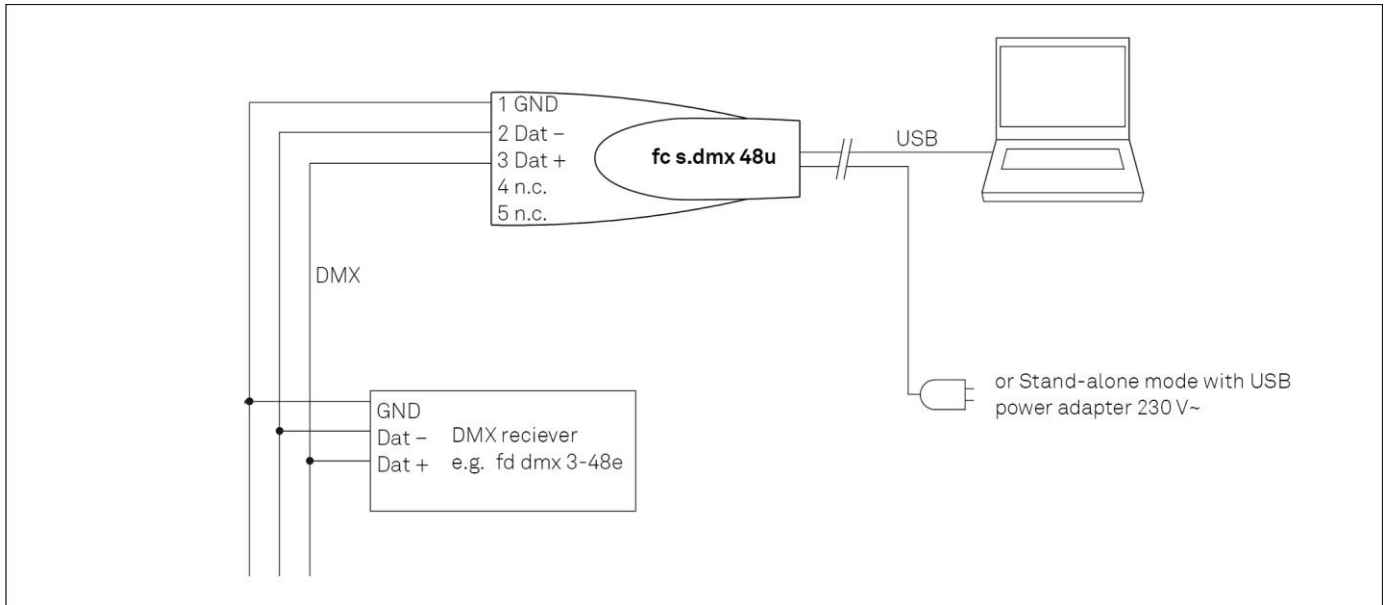

Technical Details

Supply voltage	5 V via USB
Light programs	1
Programming interface	USB
Outputs	1
Output channels	48 (Stand-alone), 512 (via PC)
Output signal	DMX, XLR-5 socket
Outputs short circuit proof	yes
Ambient temperature	-20..45 °C
Dimensions (L/W/H)	115 x 50 x 38 mm
Weight	60 g

Additional Information

- feno control software can be downloaded at www.feno.com